


PACKING DIMENSIONS (mm)

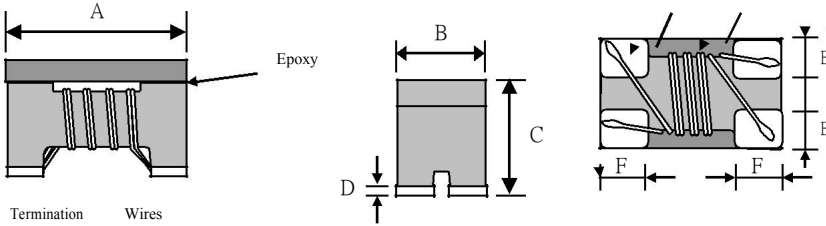

4532	Dimensions
A	4.5 ± 0.2
B	3.2 ± 0.2
C	2.8 ± 0.2
D	0.2 ± 0.1
E	1.2Typ.
F	1.0Typ.

APPLICATIONS 用途

Noise Suppression of Power Line

EXPLANATION OF PART NUMBERS

PCMF 4532 F - 301 - 2P - T

(1) (2) (3) (4) (5) (6)

- (1) Product name
- (2) Shapes and dimensions
- (3) Product identification number
- (4) Impedance 【 at 100MHz 】
301:300Ω
- (5) Number of line
- (6) Taping style

ELECTRICAL CHARACTERISTICS



P/N	Z(Ω)	DCR (Ω) [Max]	Rated	Rated	Insulation
	Common Mode		current	Voltage	Resistance
	Impedance		Idc(A)	Vdc	IR
	at 100MHz		[Max]	(V)Typical	(MΩ)Min.
PCMF4532F-301-2P-T	300	0.10	1.5	50	10

Operating temperature: - 2 5 to + 8 5 °C

Storage temp. and humidity: - 4 0 to + 8 5 °C , 7 0 % RH m a x

Typical Heat Rating DC Current would cause a n approximately ΔT of 4 0 °C

Recommended Footprint (mm)

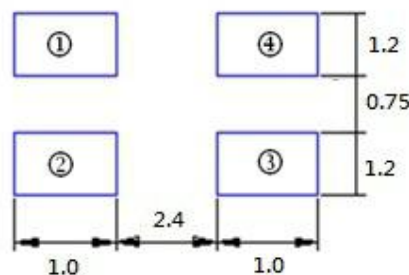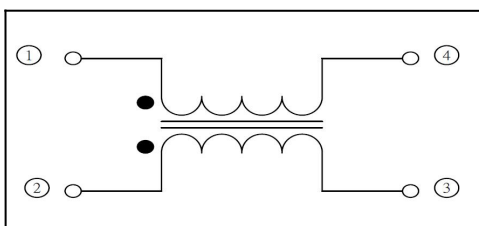

PERFORMANCE CURVES

